

WATERPROOF
and
SALTWATER
TESTED
IP68

Pro Sport 5 and 5/5 (10)


Totally waterproof (IP 68) , 3 stage Battery Charger



5/5 model
1 x 12V 10A
2 x 12V 5A
1 x 24V 5A

5 model
1 x 12V 5A

Typical Average Voltage

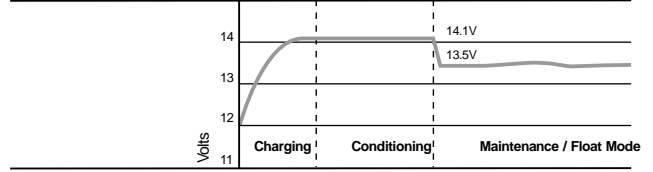

Pro Sport 5 is 1 x 12V / 5A output
Pro Sport 5/5 is 2 x 12V / 5A totally isolated outputs, can be used as 1 x 12V / 10A, 2 x 12V / 5A, or 1 x 24 v / 5A
Epoxy filled for waterproof and vibration proof aspects
Pre-wired with 1.5 meters d/c and a/c cables
d/c cables pre-fused and comes with gold plated ring terminals.

Pro Sport 5 and 5/5 waterproof battery charger 230V a/c 50 Hz only

Voltage d/c	Amperes	Outputs	Size L x W x D mm	Weight kg	Part no
12	5	1	75 x 150 x 65	2.5	PS125
12/24	12V (2 x 5A) / 12V (1 x 10A)	2	230 x 130 x 90	3.5	PS1255
or 12 V 1 X 10 amp					

AQUANAUTIC
Waterproof range

AQUANAUTIC
Waterproof range

Power Factor Corrected (PFC)

110-230V a/c auto 40-70 Hz

read benefits of PFC on page 4*

WATERPROOF
and
SALTWATER
TESTED
IP68

Includes fused wires
w/ 8mm ring terminals



12V / 8 - 20A
24V / 4 - 10A

Waterproof Aquanautic PFC	110-230V auto	Part no
12	1 8	PSP1281
12 & 24	2 8 at 12V 4 at 24V	PSP1282
12	1 12	PSP12121
12 & 24	2 12 at 12V 6 at 24V	PSP12122
12	1 20	PSP12201
12 & 24	2 20 at 12V 10 at 24V	PSP12202
12 & 24 & 36	3 20@12V 10@24V 6@36V	PSP12203

1A Float charger



Ideal for
jet skis, small boats,
bikes, lawn mowers etc.
single output.

1A Float Charger					
Volts	Amps	Size L x W x D mm	Weight kg	Part no	
12	1	60 x 60 x 60	0.5	121CE	

AQUANAUTIC
Waterproof range

Pro Sport PFC
Pro Sport 5-55
1 amp

Advice: We recommend to use waterproof battery chargers where the waterproof aspect is a priority. For all other applications we recommend our digital control units (please refer to page 4) which are lighter and have a superior performance.

●	●	Molded Plastic case
●	●	Extruded aluminium housing.
●	●	Ignition Protected
●	●	Fully waterproof to (IP 68) standard .
●	●	Both pos and neg fully isolated that enables the unit to charge 12 or 24V batteries.
●	●	Adaptive charging, ensures max charge in the batteries.
●	●	Lead acid / sealed (AGM/Gel) battery selectable for maximum performance
●	●	Preset fixed non selectable battery type for gel, sealed, AGM, and open lead acid
●	●	Dynamic thermal output control. Reduces power rather than over heat
●	●	LED power and charge indicators.
●	●	Built-in protection distributed-on-demand. Power Pack mode
●	●	3 stage charging curve.
●	●	Pre-wired waterproof loom for easy installation.
●	●	Pre-fused and gold plated terminals
●	●	12 and 24V application (except Pro Sport 5)
●	●	2 -3 x isolated outputs (except Pro Sport 5)
●	●	110 & 230V a/c auto